



USB Anchor - Hex Head

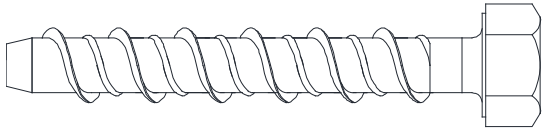


Description	Drill hole \varnothing d_0 mm	Drill depth h_1 mm	Setting depth h_{nom} mm	Head across flat SW mm	Fixture clearance \varnothing d_f mm	Fixture thickness t_{fix} mm	Anchor Length L mm	Thread diameter \varnothing mm
USB H 10x75	8	75	65	15	12	10	75	10
USB H 10x100	8	75	65	15	12	35	100	10
USB H 10x130	8	75	65	15	12	65	130	10
USB H 10x150	8	75	65	15	12	85	150	10
USB H 12x100	10	85	75	17	14	25	100	12
USB H 12x120	10	85	75	17	14	45	120	12
USB H 12x130	10	85	75	17	14	55	130	12
USB H 12x150	10	85	75	17	14	75	150	12
USB H 14x100	12	105	95	19	16	5	100	14
USB H 14x120	12	105	95	19	16	25	120	14
USB H 14x130	12	105	95	19	16	35	130	14
USB H 14x150	12	105	95	19	16	55	150	14
USB H 14x200	12	105	95	19	16	105	200	14
USB H 16x120	14	125	115	24	18	5	120	16
USB H 16x130	14	125	115	24	18	15	130	16
USB H 16x150	14	125	115	24	18	35	150	16

USB Anchor - Hex Flanged Head

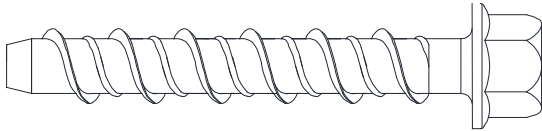

Description	Drill hole \varnothing d_0 mm	Drill depth h_1 mm	Setting depth h_{nom} mm	Head across flat SW mm	Fixture clearance \varnothing d_f mm	Fixture thickness t_{fix} mm	Anchor Length L mm	Thread diameter \varnothing mm
USB F 10x75	8	75	65	13	12	10	75	10
USB F 10x100	8	75	65	13	12	35	100	10
USB F 10x130	8	75	65	13	12	65	130	10
USB F 10x150	8	75	65	13	12	85	150	10
USB F 12x100	10	85	75	15	14	25	100	12
USB F 12x120	10	85	75	15	14	45	120	12
USB F 12x130	10	85	75	15	14	55	130	12
USB F 12x150	10	85	75	15	14	75	150	12
USB F 14x100	12	105	95	17	16	5	100	14
USB F 14x120	12	105	95	17	16	25	120	14
USB F 14x130	12	105	95	17	16	35	130	14
USB F 14x150	12	105	95	17	16	55	150	14
USB F 14x200	12	105	95	17	16	105	200	14
USB F 16x120	14	125	115	19	18	5	120	16
USB F 16x130	14	125	115	19	18	15	130	16
USB F 16x150	14	125	115	19	18	35	150	16

USB Anchor - Countersunk Trox Head

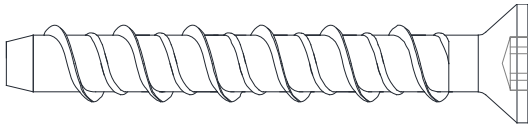

Description	Drill hole \varnothing d_0 mm	Drill depth h_1 mm	Setting depth h_{nom} mm	Trox size	Fixture clearance \varnothing d_f mm	Fixture thickness t_{fix} mm	Anchor Length L mm	Thread diameter \varnothing mm
USB C 10x75	8	75	65	T40	12	10	75	10
USB C 10x100	8	75	65	T40	12	35	100	10
USB C 10x130	8	75	65	T40	12	65	130	10
USB C 10x150	8	75	65	T40	12	85	150	10
USB C 12x100	10	85	75	T50	14	25	100	12
USB C 12x120	10	85	75	T50	14	45	120	12
USB C 12x130	10	85	75	T50	14	55	130	12
USB C 12x150	10	85	75	T50	14	75	150	12

	Head thickness h mm	Head diameter d_1 mm
USB C 10	4.6	15.5-16.5
USB C 12	5.0	18.0-19.2